

PISTON FILLERS/DEPOSITORS

SP-64 Single Piston Model

The Hinds-Bock standard-piston filler/depositor is the classic workhorse of the food processing industry. Easy to clean and operate, versatile and gentle on all products, it provides immediate cost-saving results. Large port openings permit filling of large particulates without crushing. USDA and AG Canada approved.

PARTIAL PRODUCT LIST:

- Jams & Jellies
- Pie Fillings
- Cake Batters
- Flowable Dough's
- Fruit Cake Batters
- Fruit Puree
- Mayonnaise
- Salad Dressings
- Potato Salad
- Macaroni Salad
- Cole Slaw
- Burrito Fillings
- Meat Pie Fillings
- Stews
- Soups & Sauces
- Relish
- Mustard
- Ketchup
- Caramel
- Cream Topping
- Salsa
- Chili
- Baked Beans
- Dips & Spreads
- Shampoo
- Creams & Lotions
- HOT OR COLD PRODUCTS**



STANDARD FEATURES

- Air powered – consult factory for compressed air requirements
- 18 inches of height adjustment
- Locking swivel casters
- Stainless steel construction with all contact parts of food-approved materials
- Fills from fraction of an ounce to 64 ounces with change cylinders

E-mail: INFO@HINDS-BOCK.COM | Web: WWW.HINDS-BOCK.COM

Options Available to Match Process Requirements

Options Include: Conical (10-20 gallon) hoppers, "U"-shaped agitated hopper, change cylinders, a variety of spouting, automatic & semi-automatic controls, level probes, agitators... all matched to customers' applications



SP-64 and P-128 Product Transfer Pump
The Classic Workhorse Duo!




Hinds-Bock has specialized in the design of fillers/depositors since their beginning in 1976. These labor-saving fillers/depositors all provide:

- ❑ Improved quality when depositing large, delicate particulates, damage free.
- ❑ Reduced costs with accurate filling/depositing into trays, bottles, cans, pouches, or targeted into baking pans as pictured below.
- ❑ Improved payback with versatility, ease of maintenance and operation.



ASK ABOUT CUP & TRY DENESTERS AND LID APPLICATIONS
ASK ABOUT TRANSFER PUMPS TO FILL THE HOPPER

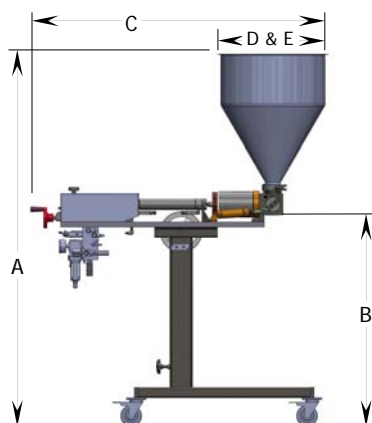

Standard Model Specifications

MODEL	A	B	C	HOPPER WIDTH		* REQ'D CFM
				D	E	
SP-64 SINGLE PISTON	70"-88"	44.5"-54"	56"	22"	N/A	4-6

* Approximate CFM. Consult factory for exact CFM requirements.