


PRE-DEPOSITED MUFFIN LINE

Capacities up to 12,000 pounds per hour.

Line includes:

- Servo driven dual lane indexing conveyor
- Right angle overhead rake discharge or straight through discharge conveyor.
- 12 piston depositor with automatic weight adjust interfaced with a check-weigher.
- Diving spout bridge for bottom-up depositing of stiff or cold batters.
- Large port openings for gentle handling of particulates.
- PLC control with operator interface.
- Tilt hopper for easy sanitizing.
- Large intermediate hopper to automatically load the depositor hopper.
- Interlocked safety covers.

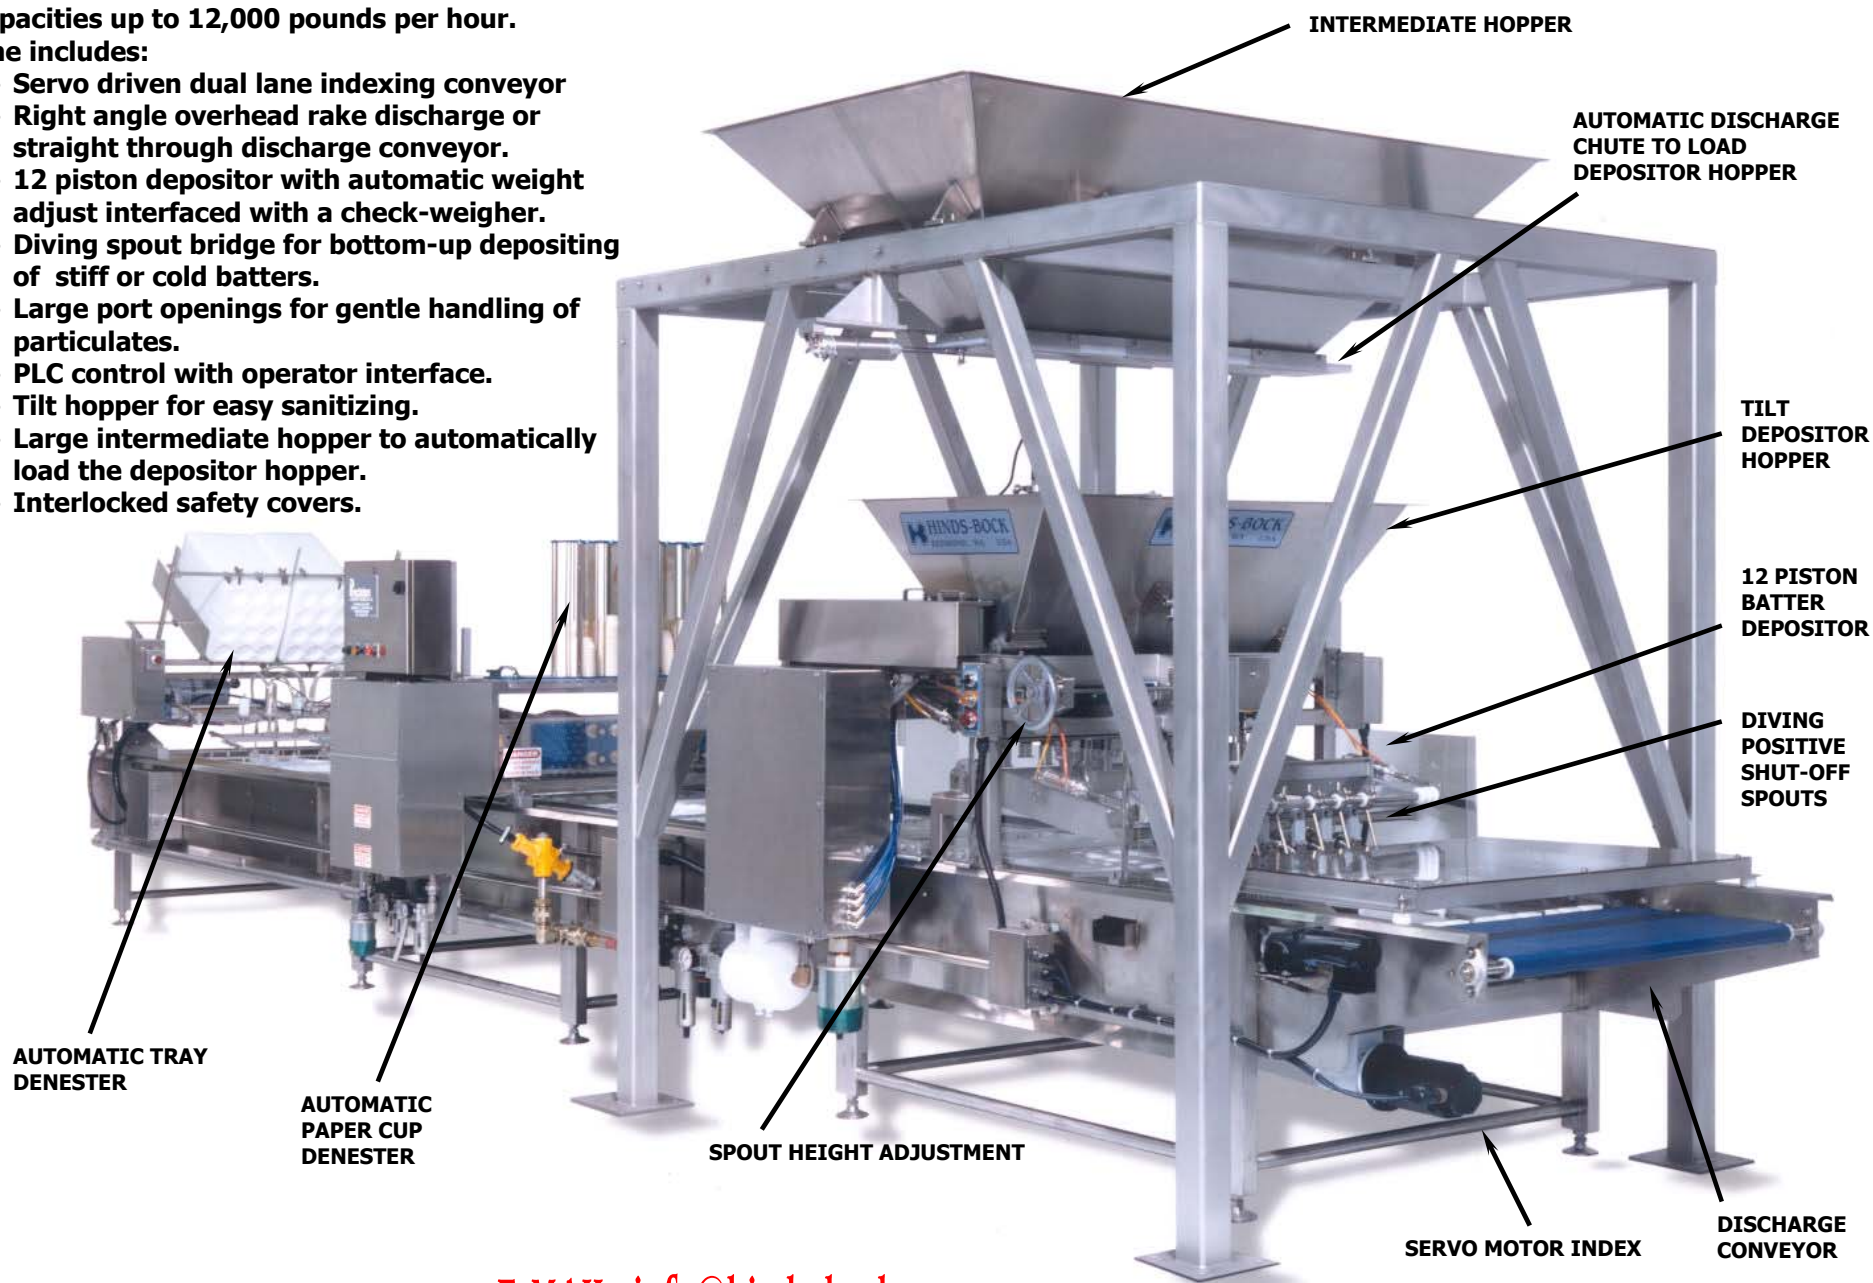

 **HINDS-BOCK**
CORPORATION

E-MAIL: info@hinds-bock.com
WEB: www.hinds-bock.com

14690 N.E. 95TH ST., REDMOND, WASHINGTON 98052-2544 U.S.A.
1.877.292.5715 Toll Free TEL: 425.885.1183 – FAX: 425.885.1492

HB-PDML