


# GENTLE PRODUCT TRANSFER PUMPS

Hinds-Bock's piston & hydraulic transfer pumps move hot or cold, flowable liquid products and mixtures from mixing, holding or cooking vessels to filling machines. Available in two sizes (128oz & 250oz/stroke); with speeds to 40 GPM depending on product characteristics, piping configuration and model

## MAINTAIN QUALITY OF DELICATE PARTICULATES

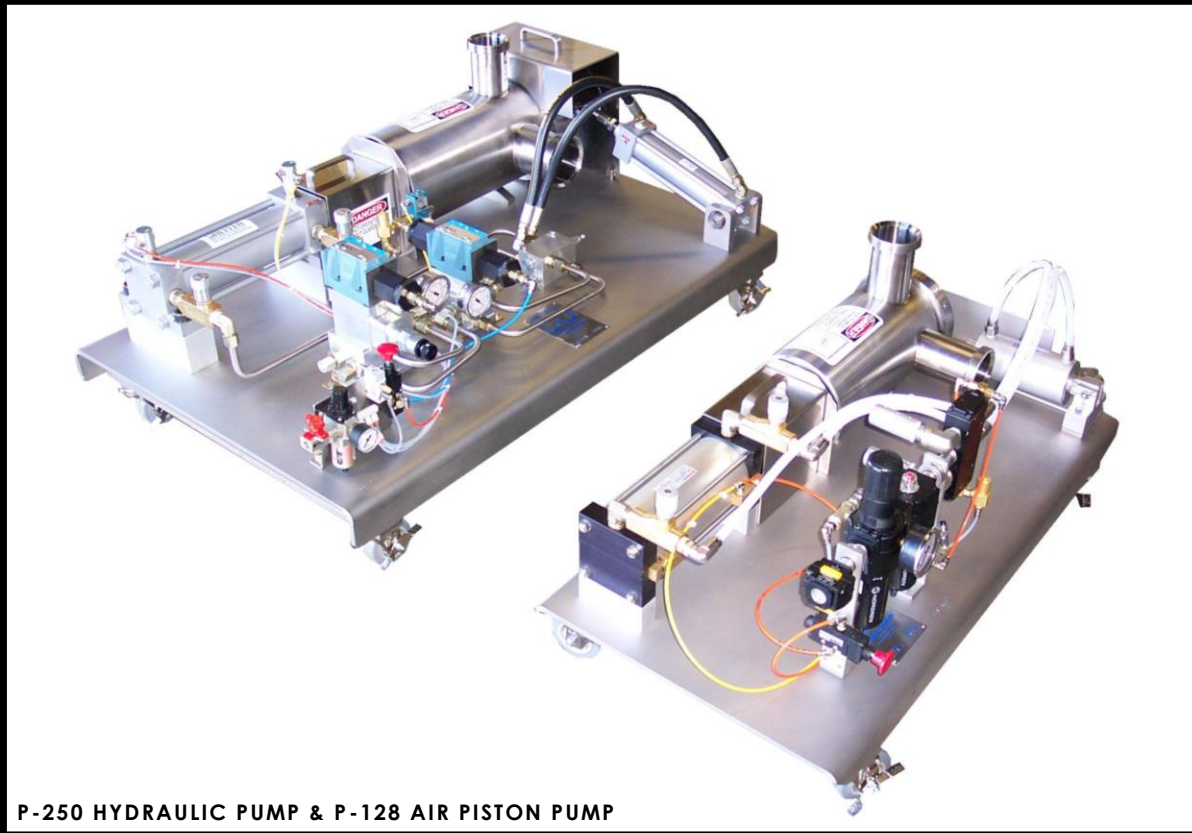


P-250 HYDRAULIC PUMP & P-128 AIR PISTON PUMP

- Inherently low shear, gentle pumping action with wide, open ports and valves and large sanitary fittings (3"+) allows pumping of large soft chunks and particulates without bridging or crushing.
- Independently adjustable suction and discharge stroke speed maximizes efficiency to allow pumping of a broad range of products with delicate particulates from thin noodle soups and gravies to thick deli salads, shredded meat burrito filling, macaroni and cheese, chili, vegetable stew, fruit fillings, and blueberry muffin batters.

## RUGGED, SANITARY DESIGN INCREASES UTILIZATION

- USDA approved.
- Mounted on swivel casters for easy movement to process area or cleanup station.
- Simple spanner wrench used for disassembly/re-assembly.
- Inexpensive, easily cleans O-ring seals.
- Engineered to tolerate high pressure spray wash-down.
- No damage from cavitation or accidental dead-heading.

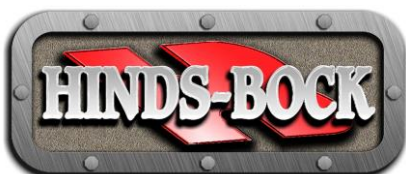

2122 – 222<sup>nd</sup> Street S.E. | Bothell, WA 98021 | USA

Tel: 425.885.1183 • Fax: 425.885.1492

E-mail: [info@hinds-bock.com](mailto:info@hinds-bock.com) | Website: [www.hinds-bock.com](http://www.hinds-bock.com)

# OPTIONS AVAILABLE TO MATCH PROCESS REQUIREMENTS



P-128 ON RAISED STAND w/2P-64 FILLER



P-128 ON RAISED STAND w/SP-64 FILLER




**P-50 Vertical Transfer Pump:**  
Designed specifically to handle bakery batters with particulates such as blueberries



**P-128 w/175 Gallon Tank:**  
Direct dump from tilt cooking/mixing bowl to integral hopper models

## STANDARD MODEL SPECIFICATIONS

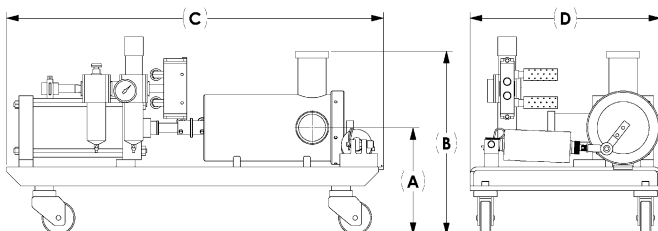

Pump Model	Max GPM	Port Size	A	B	C	* Power
P-128	40	3"	11"	19.5"	38.5"	20"
P-250H	60	3"to4"	14.8"	18.5"	60"	27.5"

\*Consult factory on Air/Hydraulic requirements

- Suction and discharge ports are easily reversible
- Delrin (Plastic) valve for cold products (20°F - 95°F)
- D.M. (Metal) valve for hot products (20°F - 220°F)